

Classical Solution of Wave equation

$$\nabla^2 u = \frac{1}{c^2} \frac{\partial^2 u}{\partial t^2} ; u : \text{displacement}$$

- One dimensional

$$\frac{\partial^2 u}{\partial x^2} = \frac{1}{c^2} \frac{\partial^2 u}{\partial t^2}$$

$$u(x, t) = f(x - ct) + g(x + ct)$$

- Spherical Symmetry

$$\frac{\partial^2 u}{\partial r^2} + \frac{2}{r} \frac{\partial u}{\partial r} - \frac{2u}{r^2} = \frac{1}{c^2} \frac{\partial^2 u}{\partial t^2}$$

$$u(r, t) = f \frac{(r - ct)}{r} + g \frac{(r + ct)}{r}$$

- Cylindrical Symmetry

$$\frac{\partial^2 u}{\partial r^2} + \frac{1}{r} \frac{\partial u}{\partial r} - \frac{u}{r^2} = \frac{1}{c^2} \frac{\partial^2 u}{\partial t^2}$$

$$u(r, t) = \sum_{n=1}^{\infty} c_n J_1(\varepsilon_n \xi) \cos(\varepsilon_n \theta)$$

$$\xi = r/R, \theta = ct/R$$

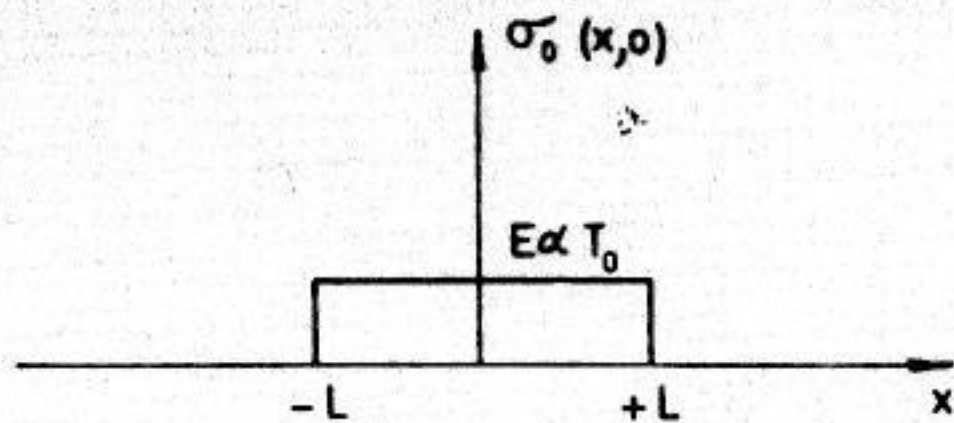


Fig. 1 Initial axial stress distribution in an instantaneously heated rod.

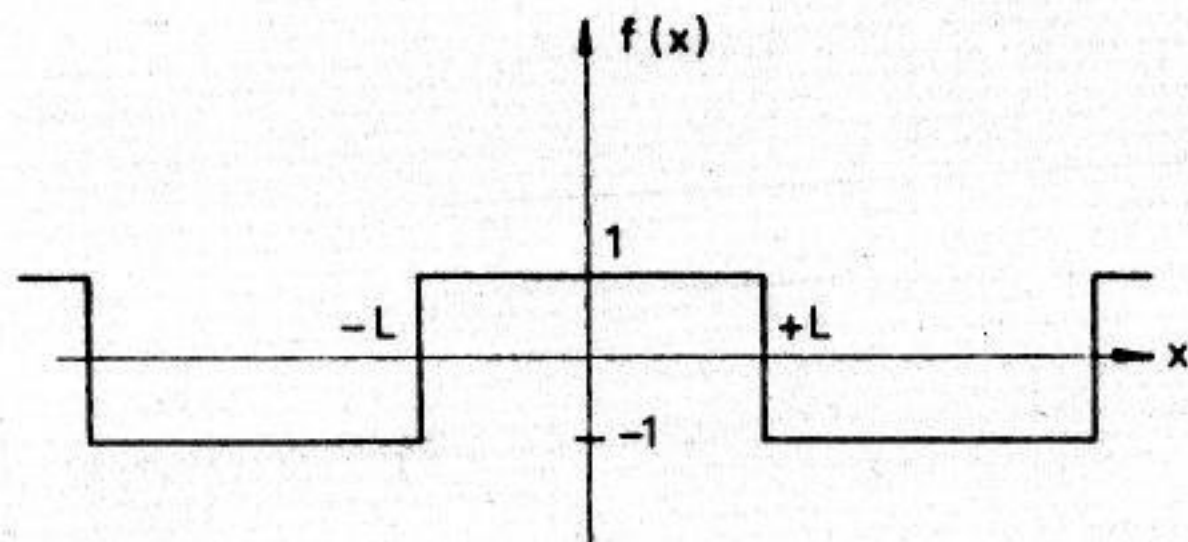


Fig. 2 The square wave describing the initial axial stress distribution in the rod $-L \leq x \leq +L$.

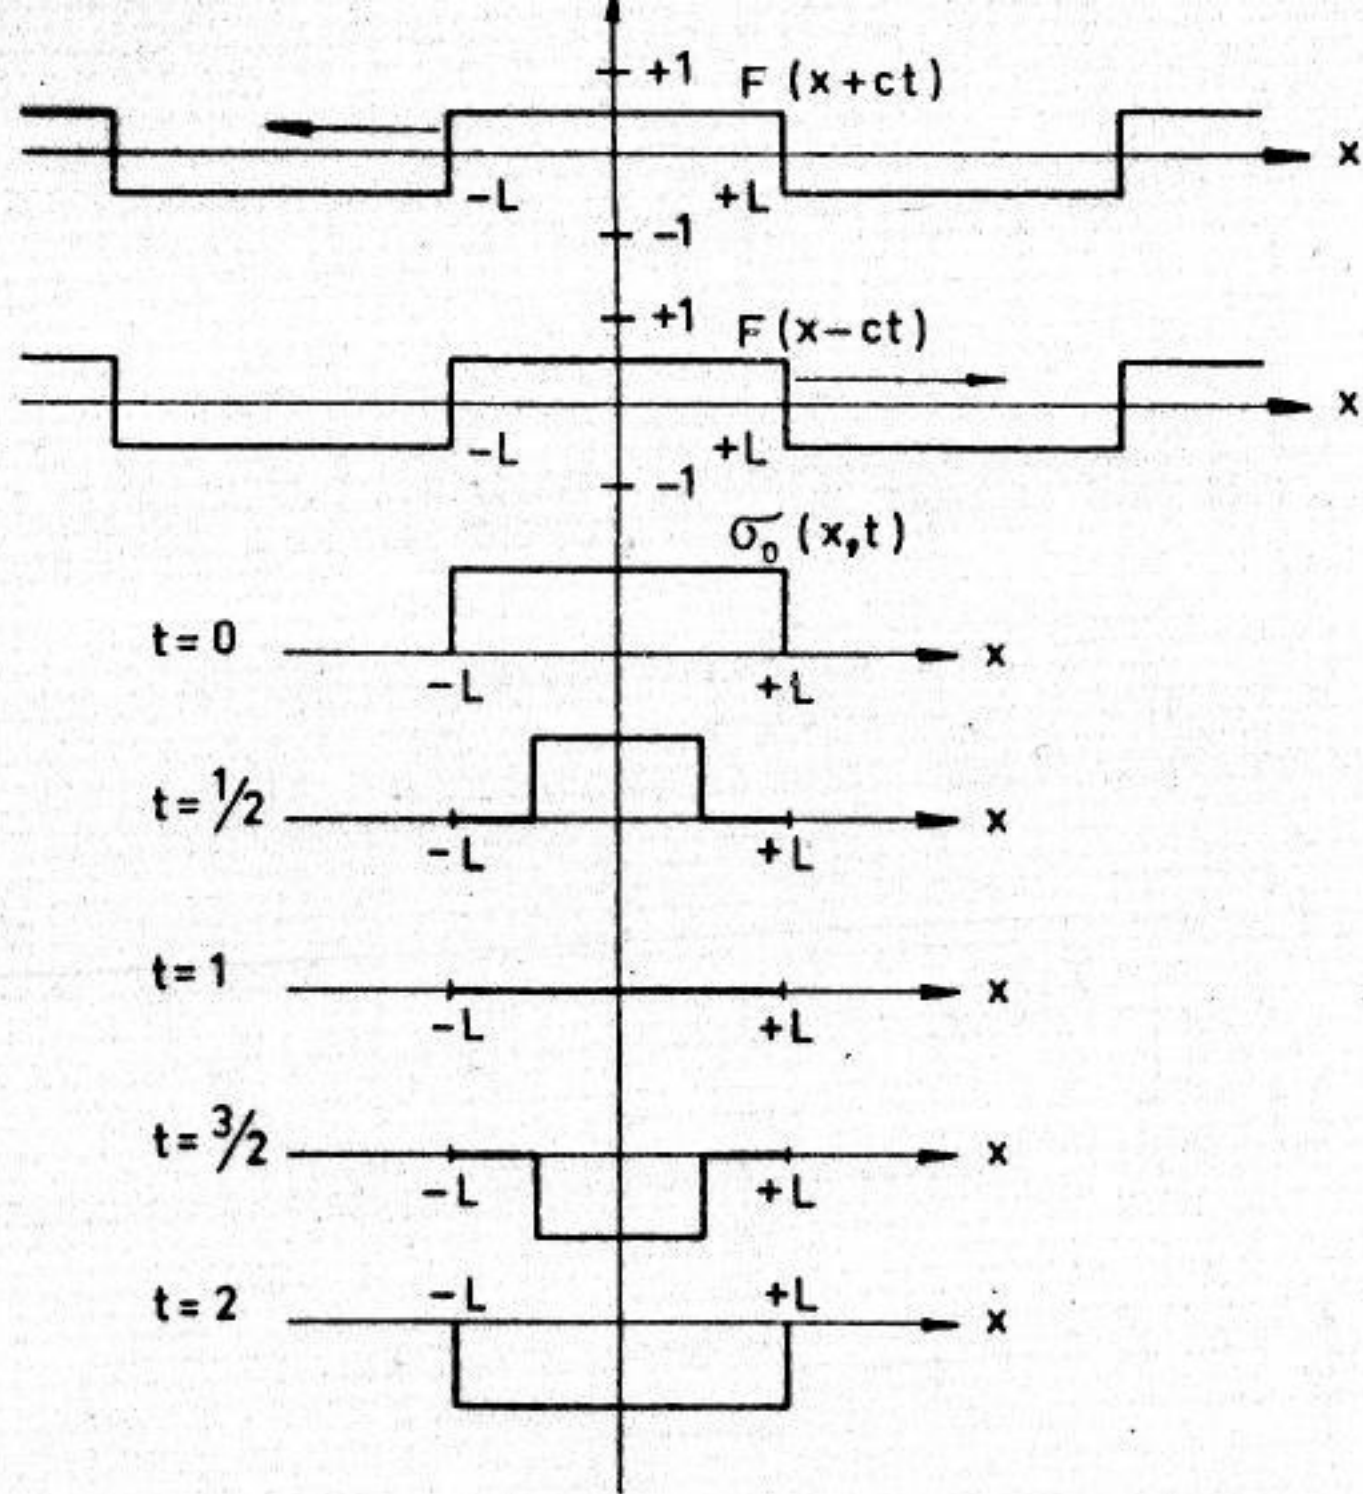
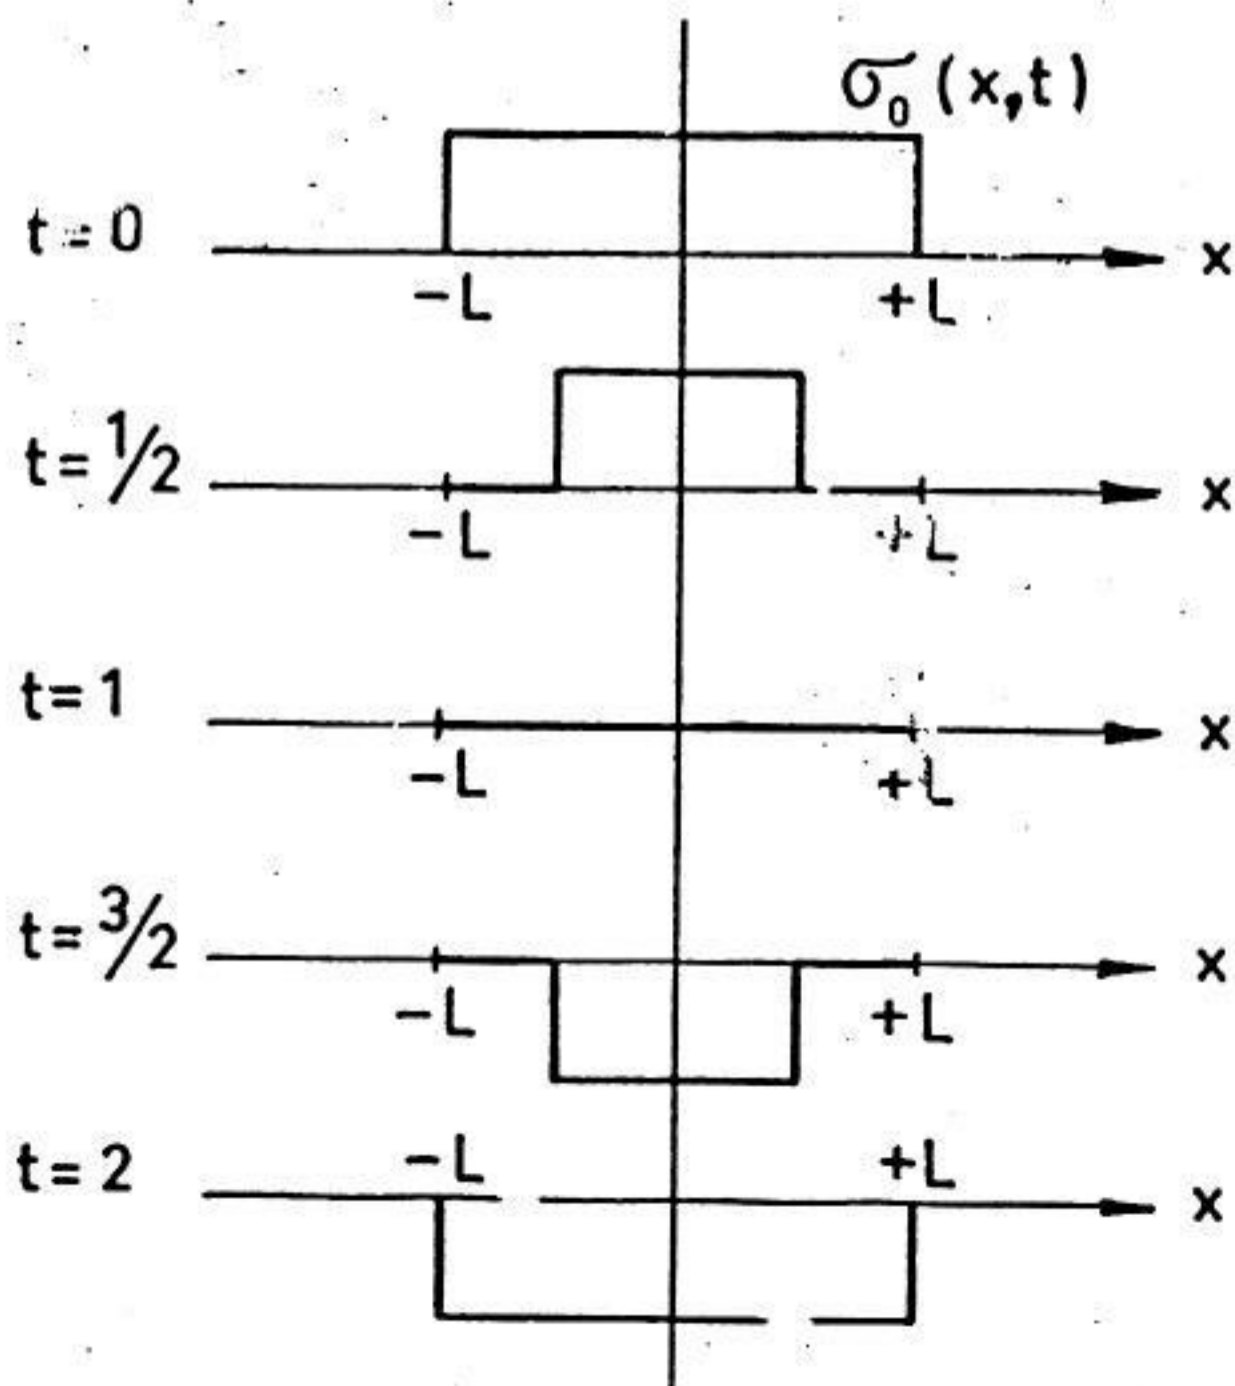
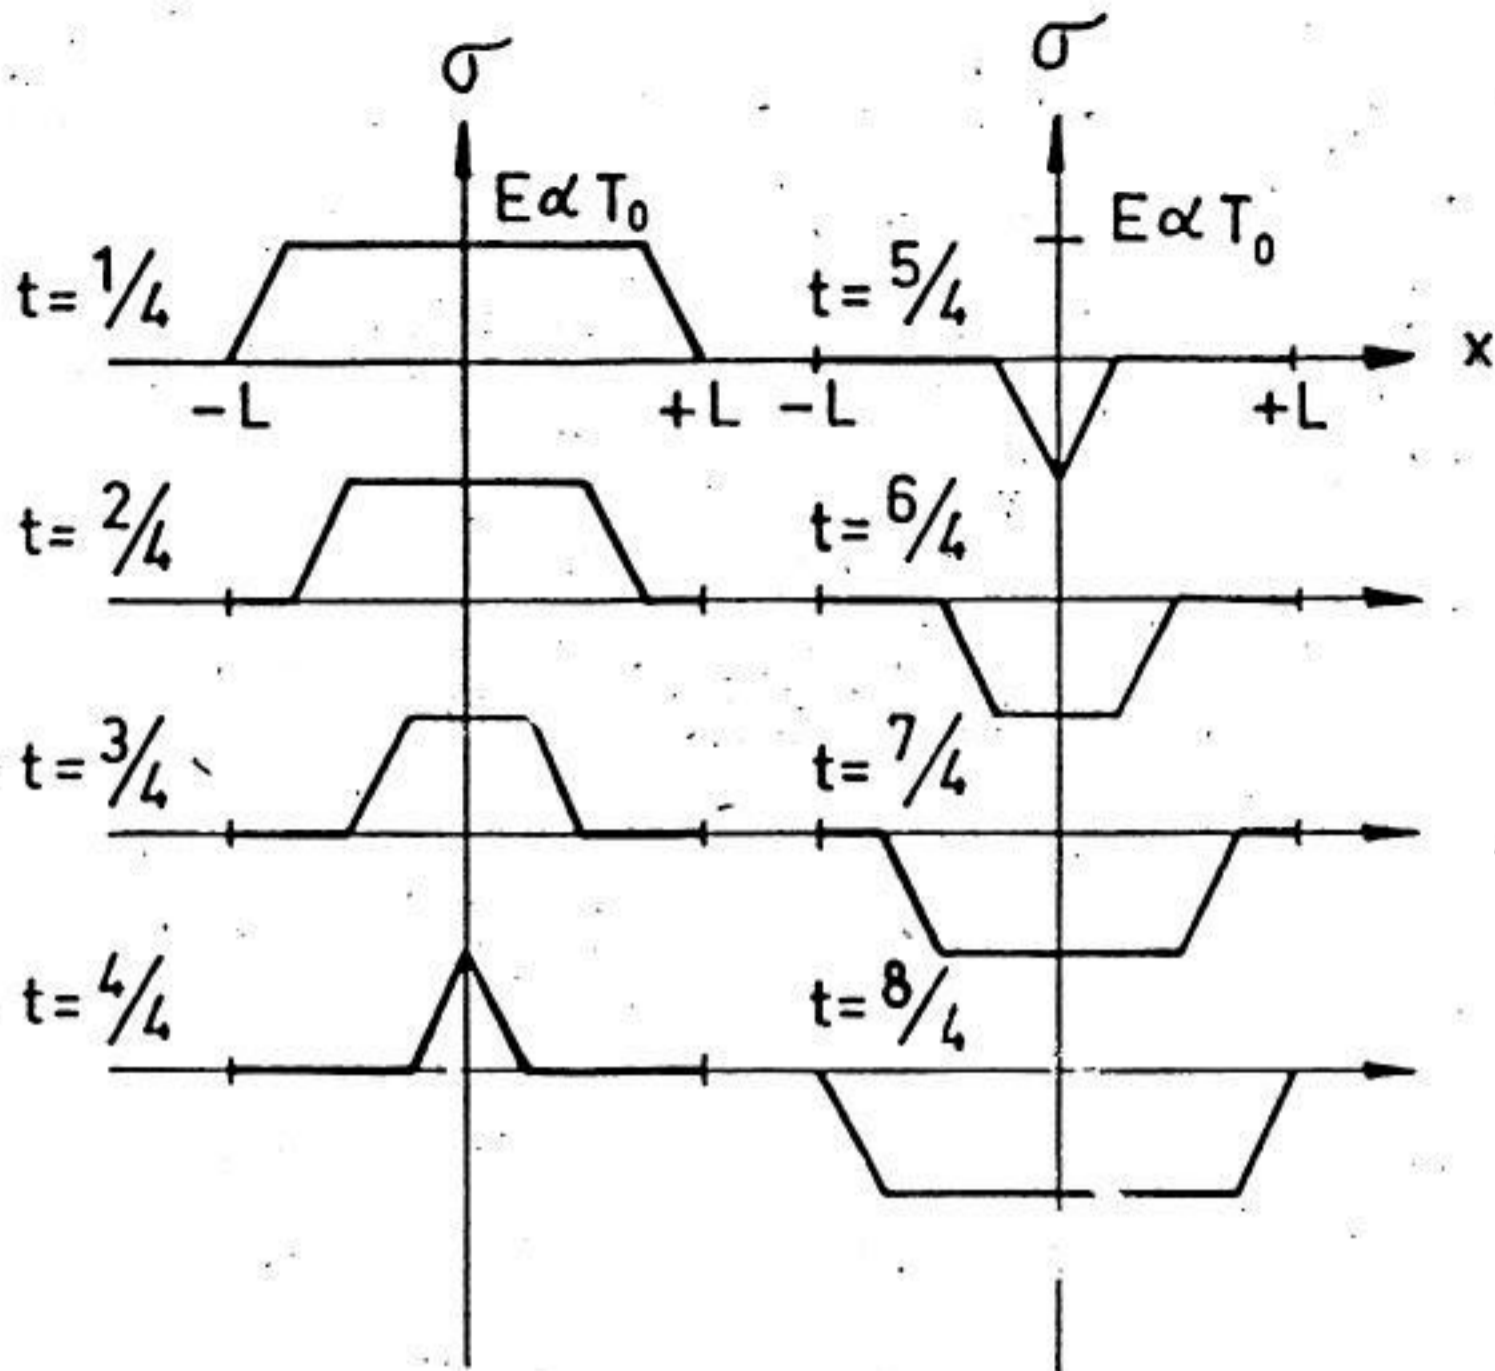


Fig. 3 The development of the axial stress in the instantaneously heated rod, obtained by the superposition of two square waves $F(x,t)$, travelling in opposite directions. The time t is measured in units of L/c .



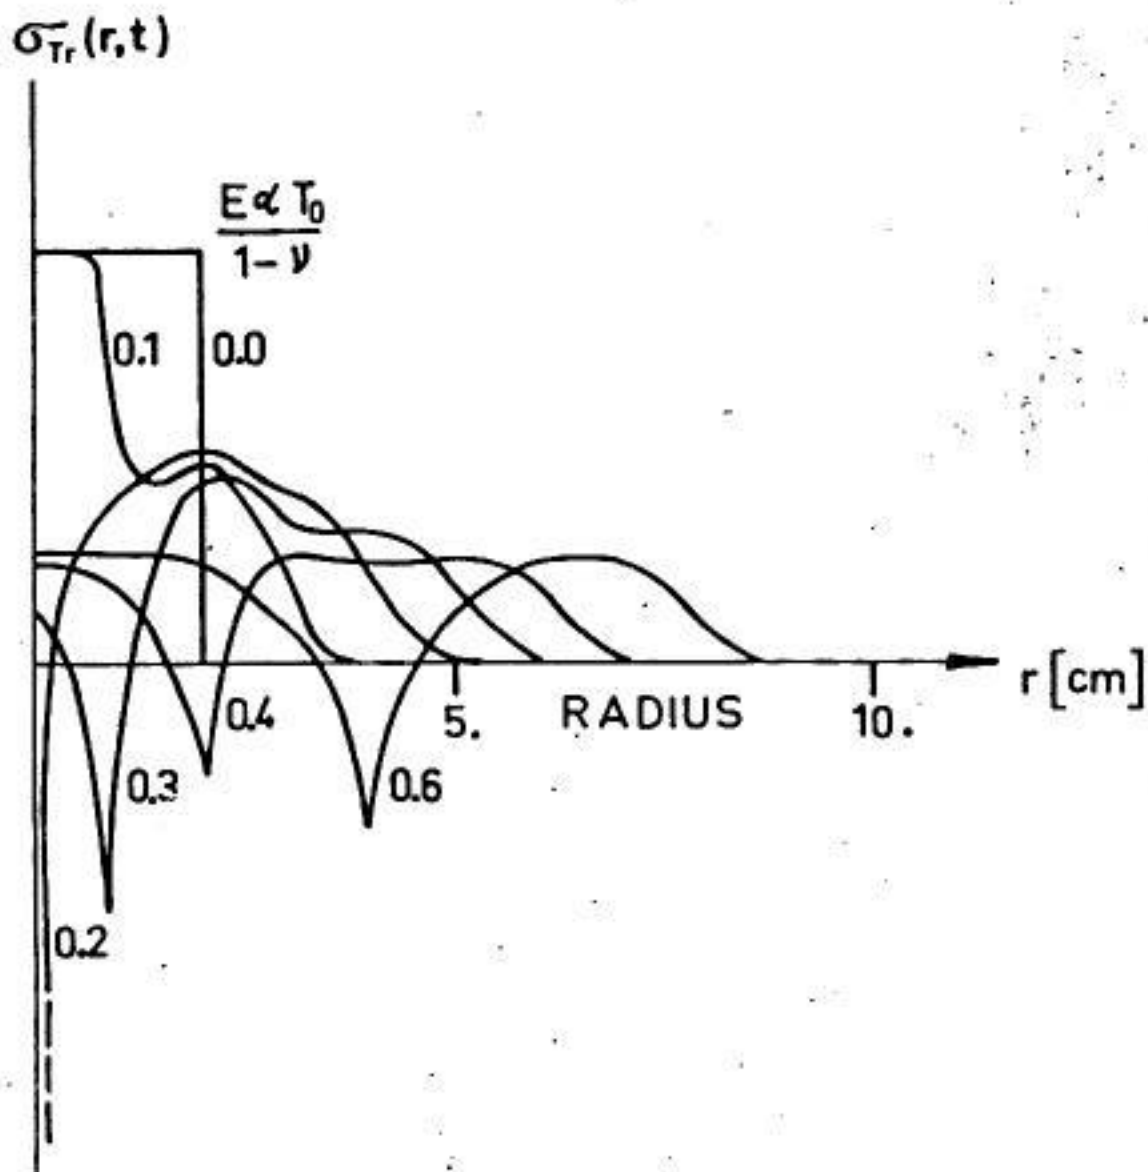


Fig. 13 The total (quasi-static plus dynamic) radial stress in an instantaneously heated disk of radius R at different times. The time parameters are given in units of R/c .

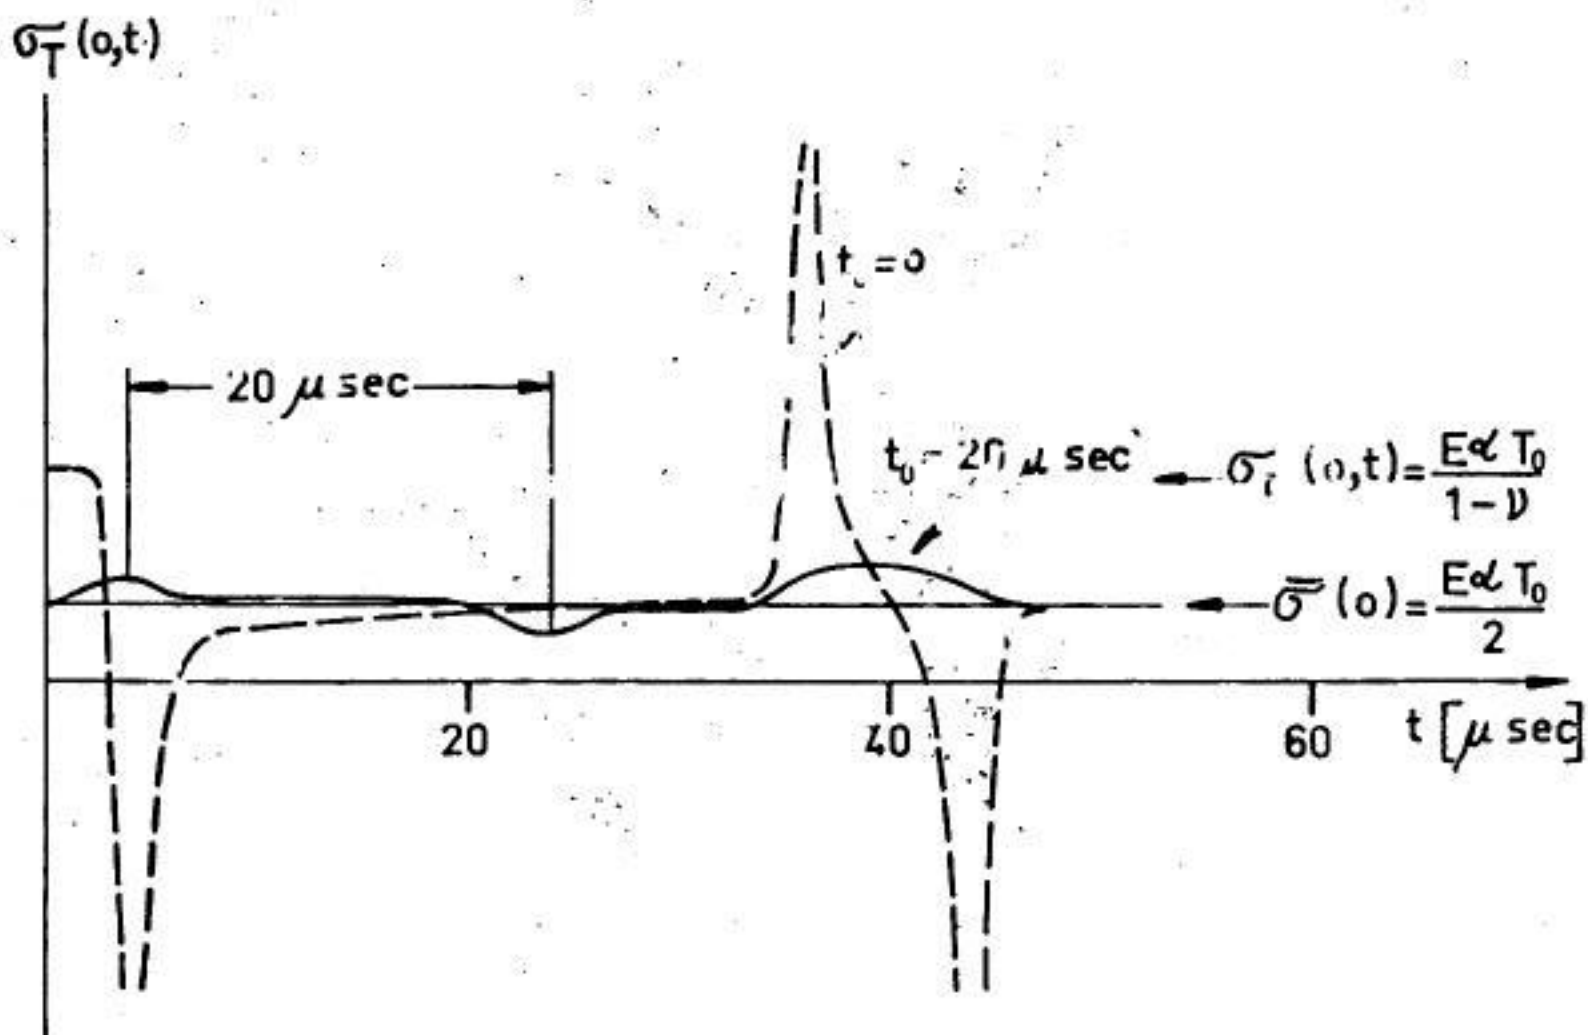


Fig. 14 The development of the total central stress in time for an infinitely rapid ($t_0 = 0$) and a finite ($t_0 = 20 \mu\text{sec}$) temperature increase.

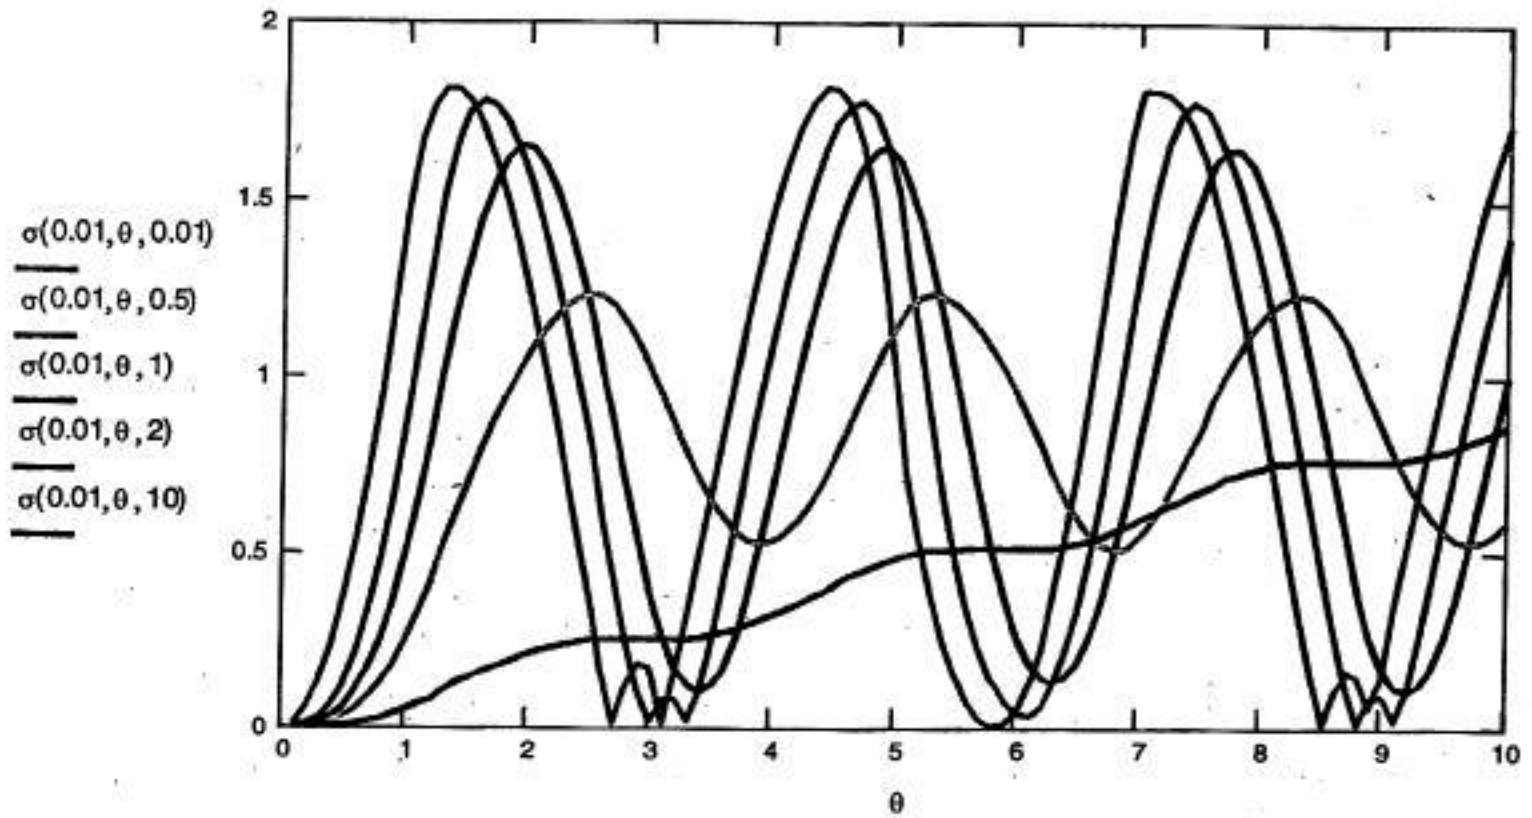


Fig. 1: Equivalent v. Mises stress (in relative units of $E\alpha_L\Delta T_0$) vs. time θ (θ in relative units of R/c) in the center of a solid target. In addition to the black curve, which is for infinitely fast heating, also oscillations are shown for uniform heating over the durations $\theta_0 = 0.5, 1, 2$ and 10 (θ_0 in units of R/c).


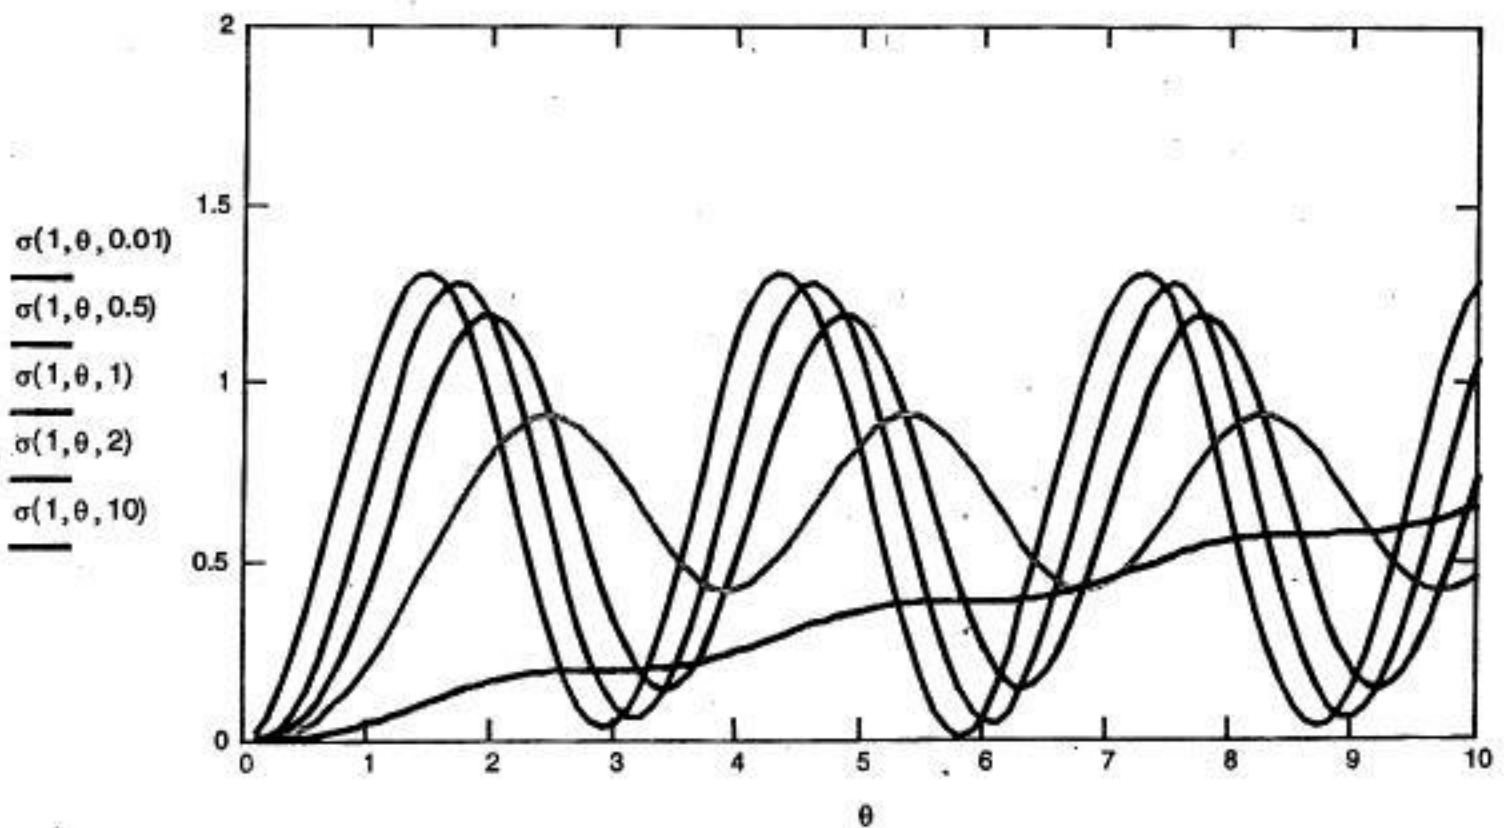


Fig. 2: Equivalent v. Mises stress vs. time at the outer radius of a solid target. The same units as in Fig. 1 apply.

Pressure in Ir

(by N. Tahir, Aug. 2006)

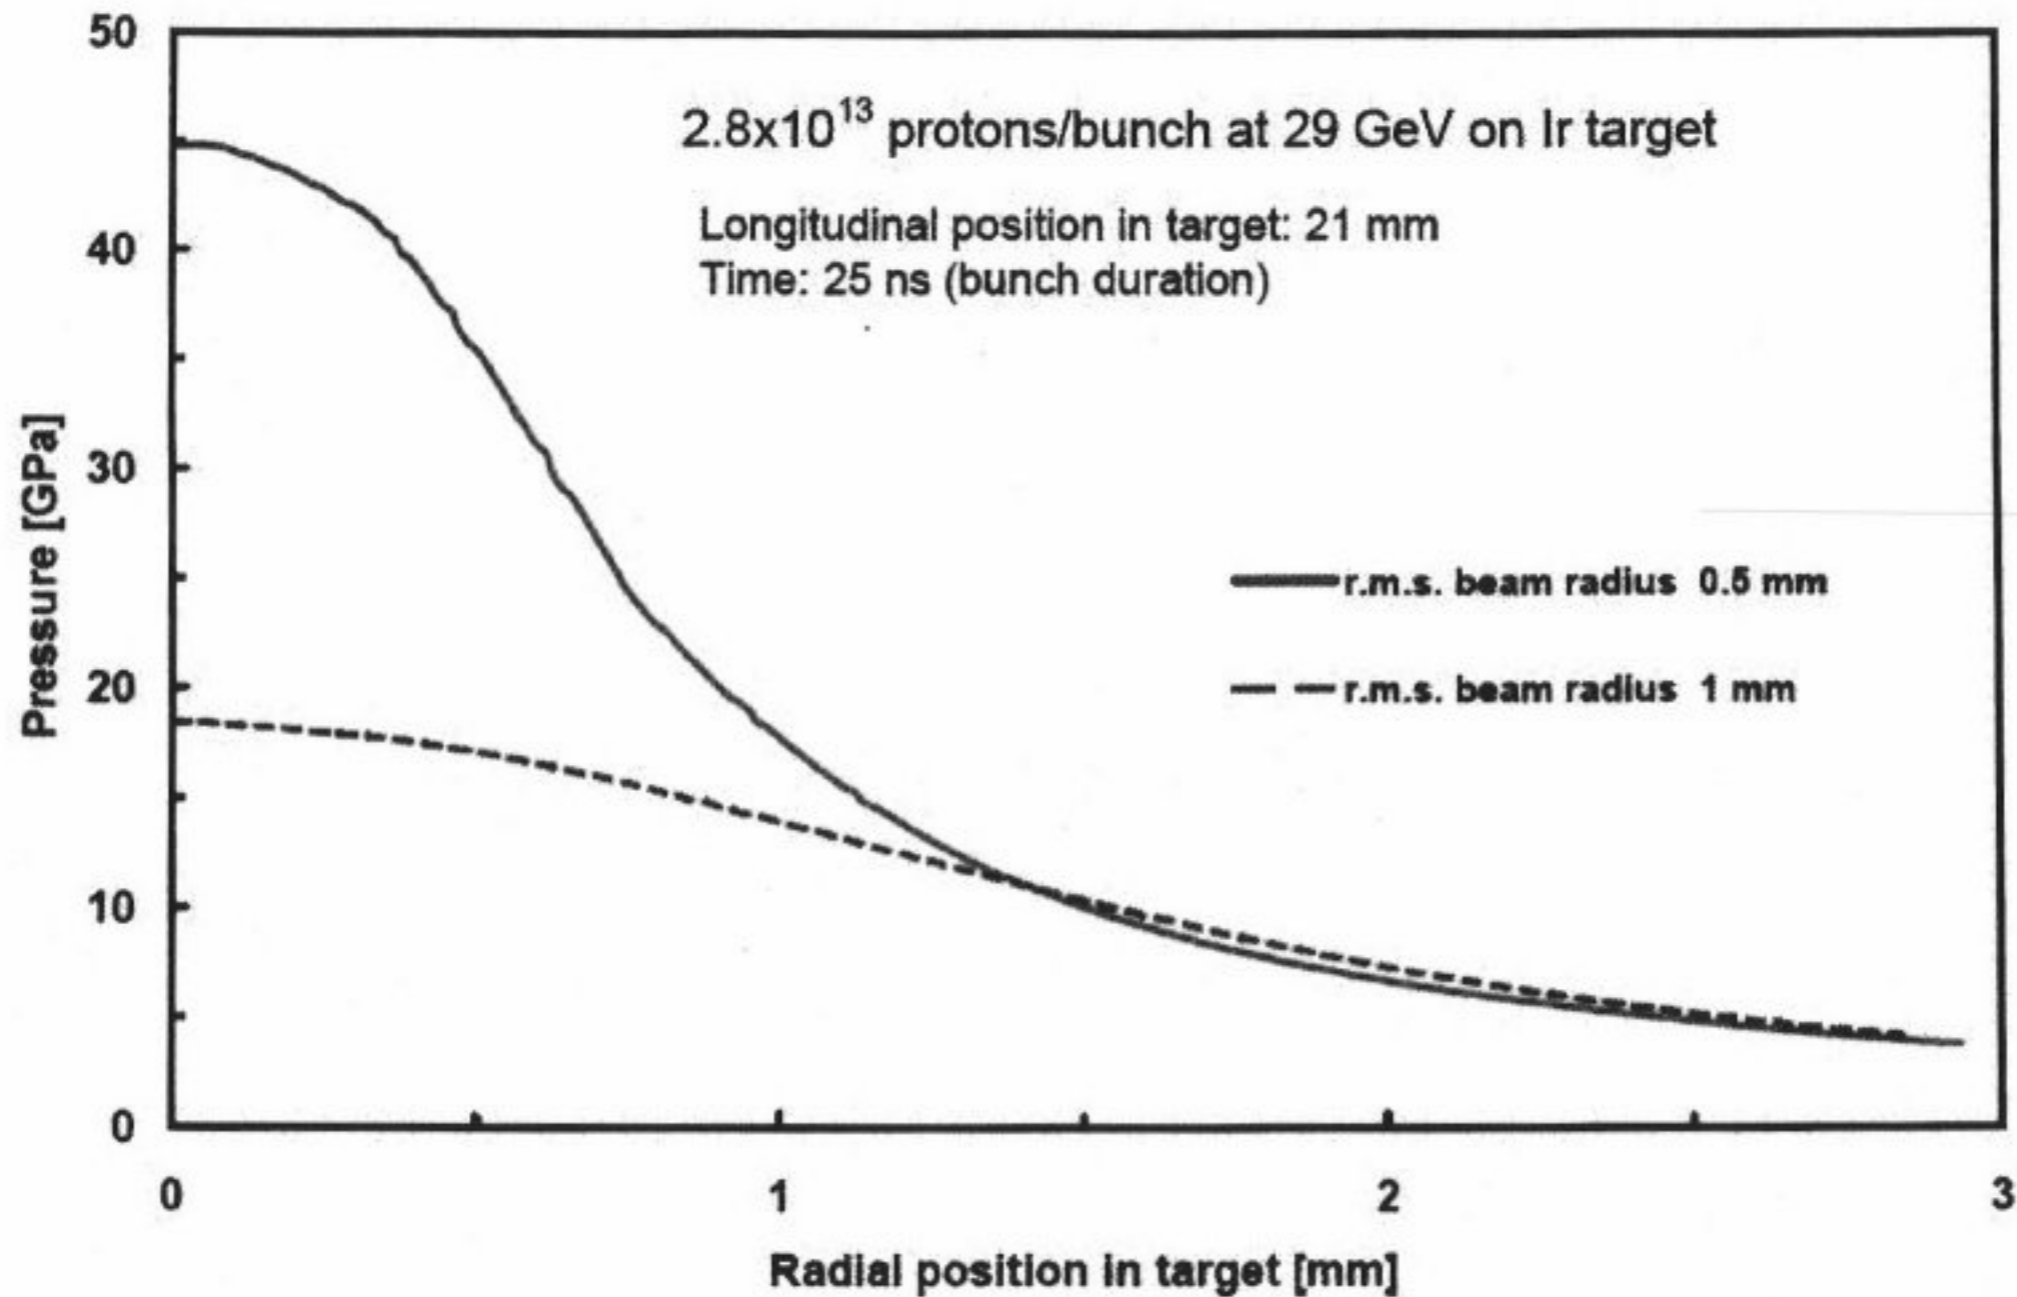


Burst Frequency : 50 Hz


Target : 1cm x 1cm

L = 40cm



Free
Jet

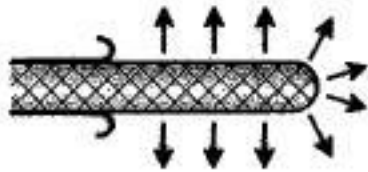

Pulsed
Curtain



Continuous Curtain
Tip explodes Curtain explodes

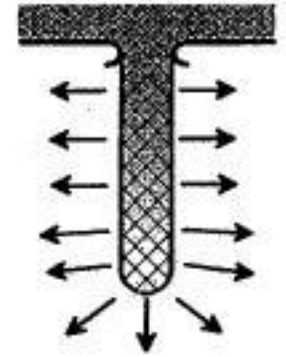

Volume Flow
(cm³/s)

2000.

2000.

2000.

5000.

Velocity at
nozzle
(m/s)

>20.

1.25

0.5

1.25

Pressure
(kPa)

2700

10.5



1.7



10.5

Pulsed Pressure.
Mech. or el. magn.
valve



LIQUID TARGET RADIAL INJECTION INTO SOLENOID

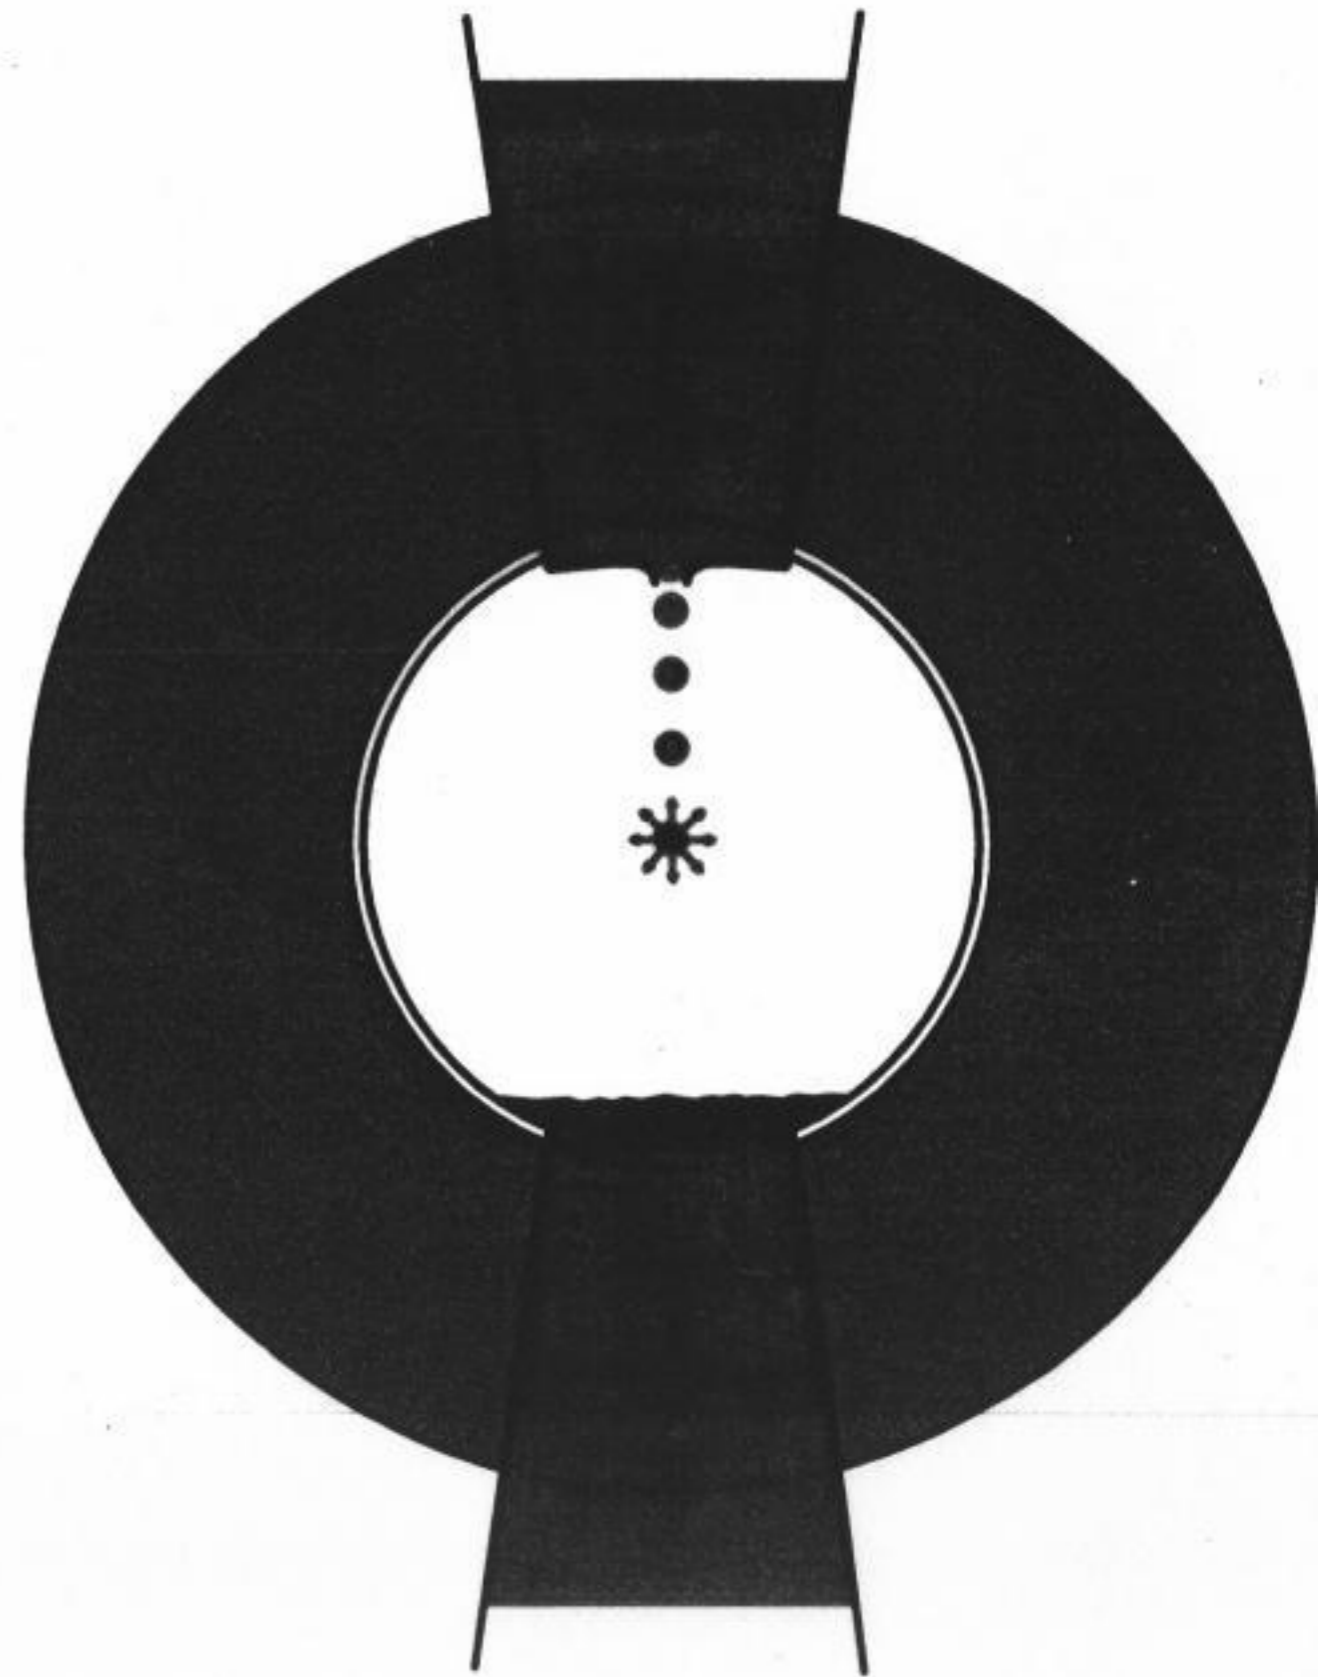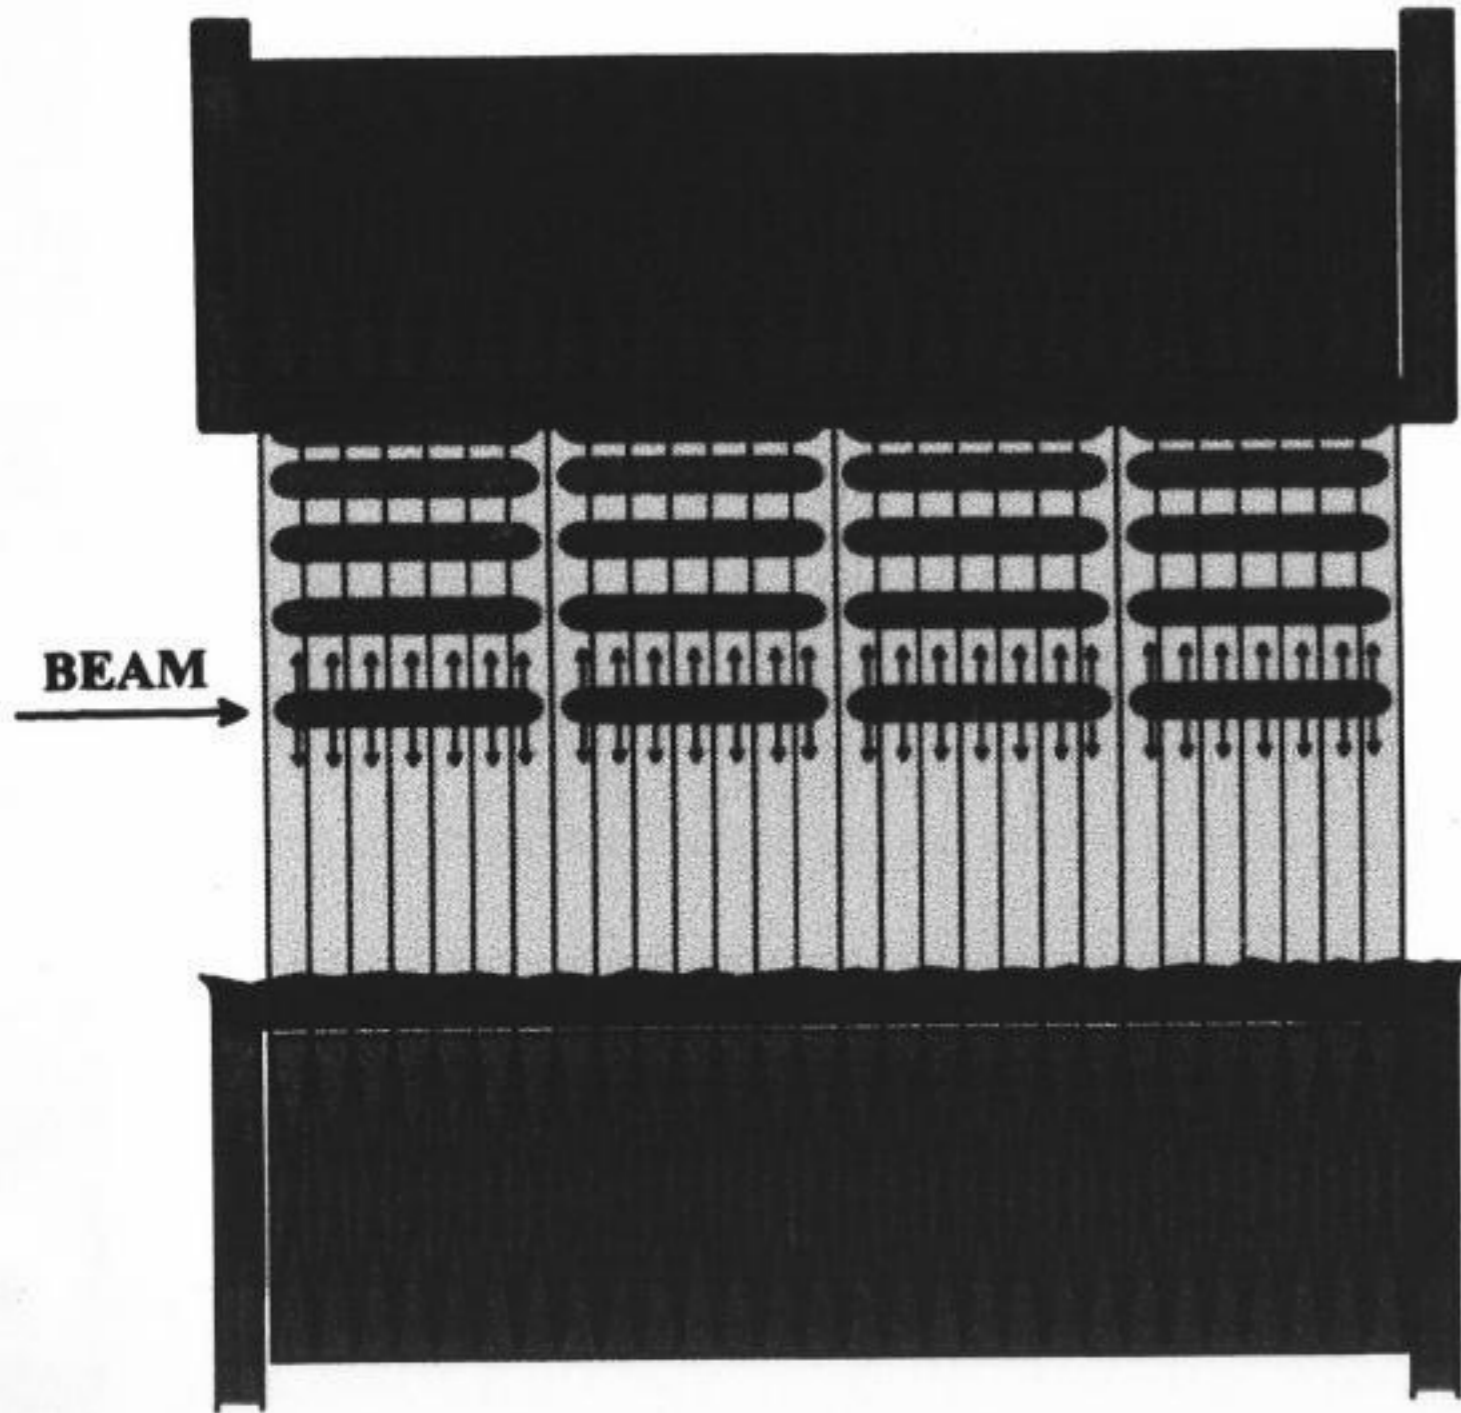

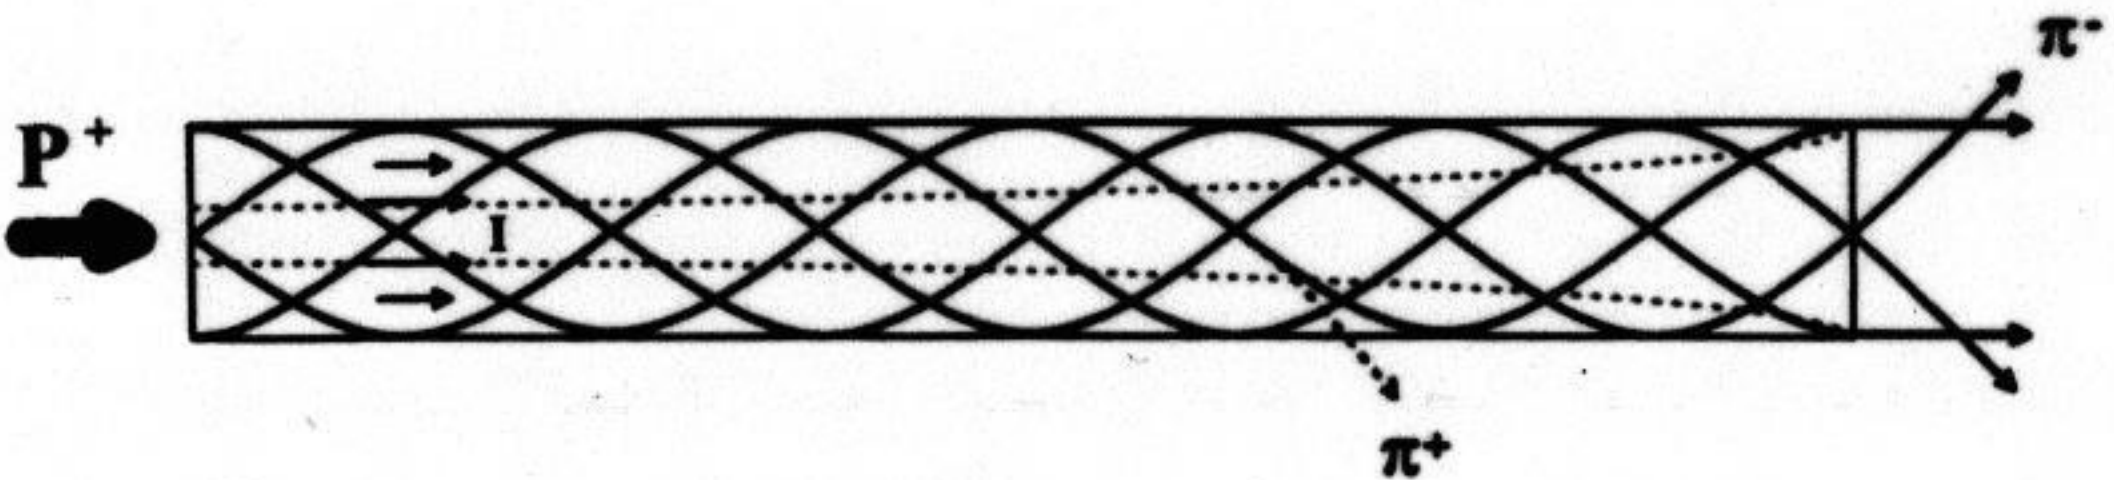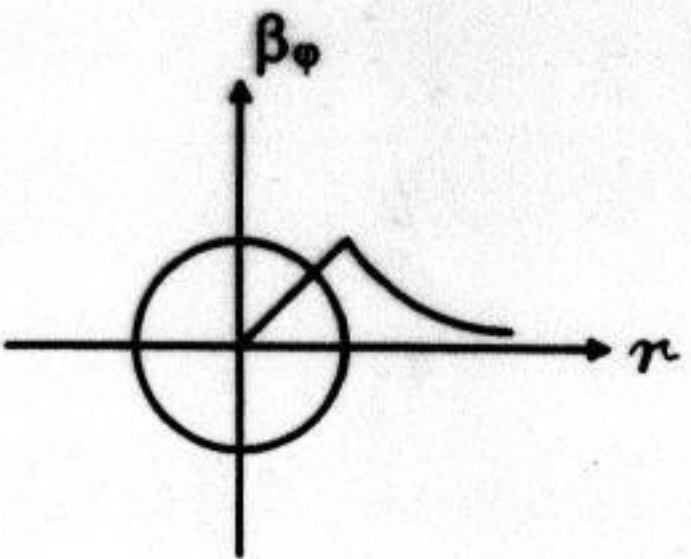


SOLENOID



$p = 500 \text{ MeV/c}$
 $R = 4 \text{ cm}$

PULSED TARGET

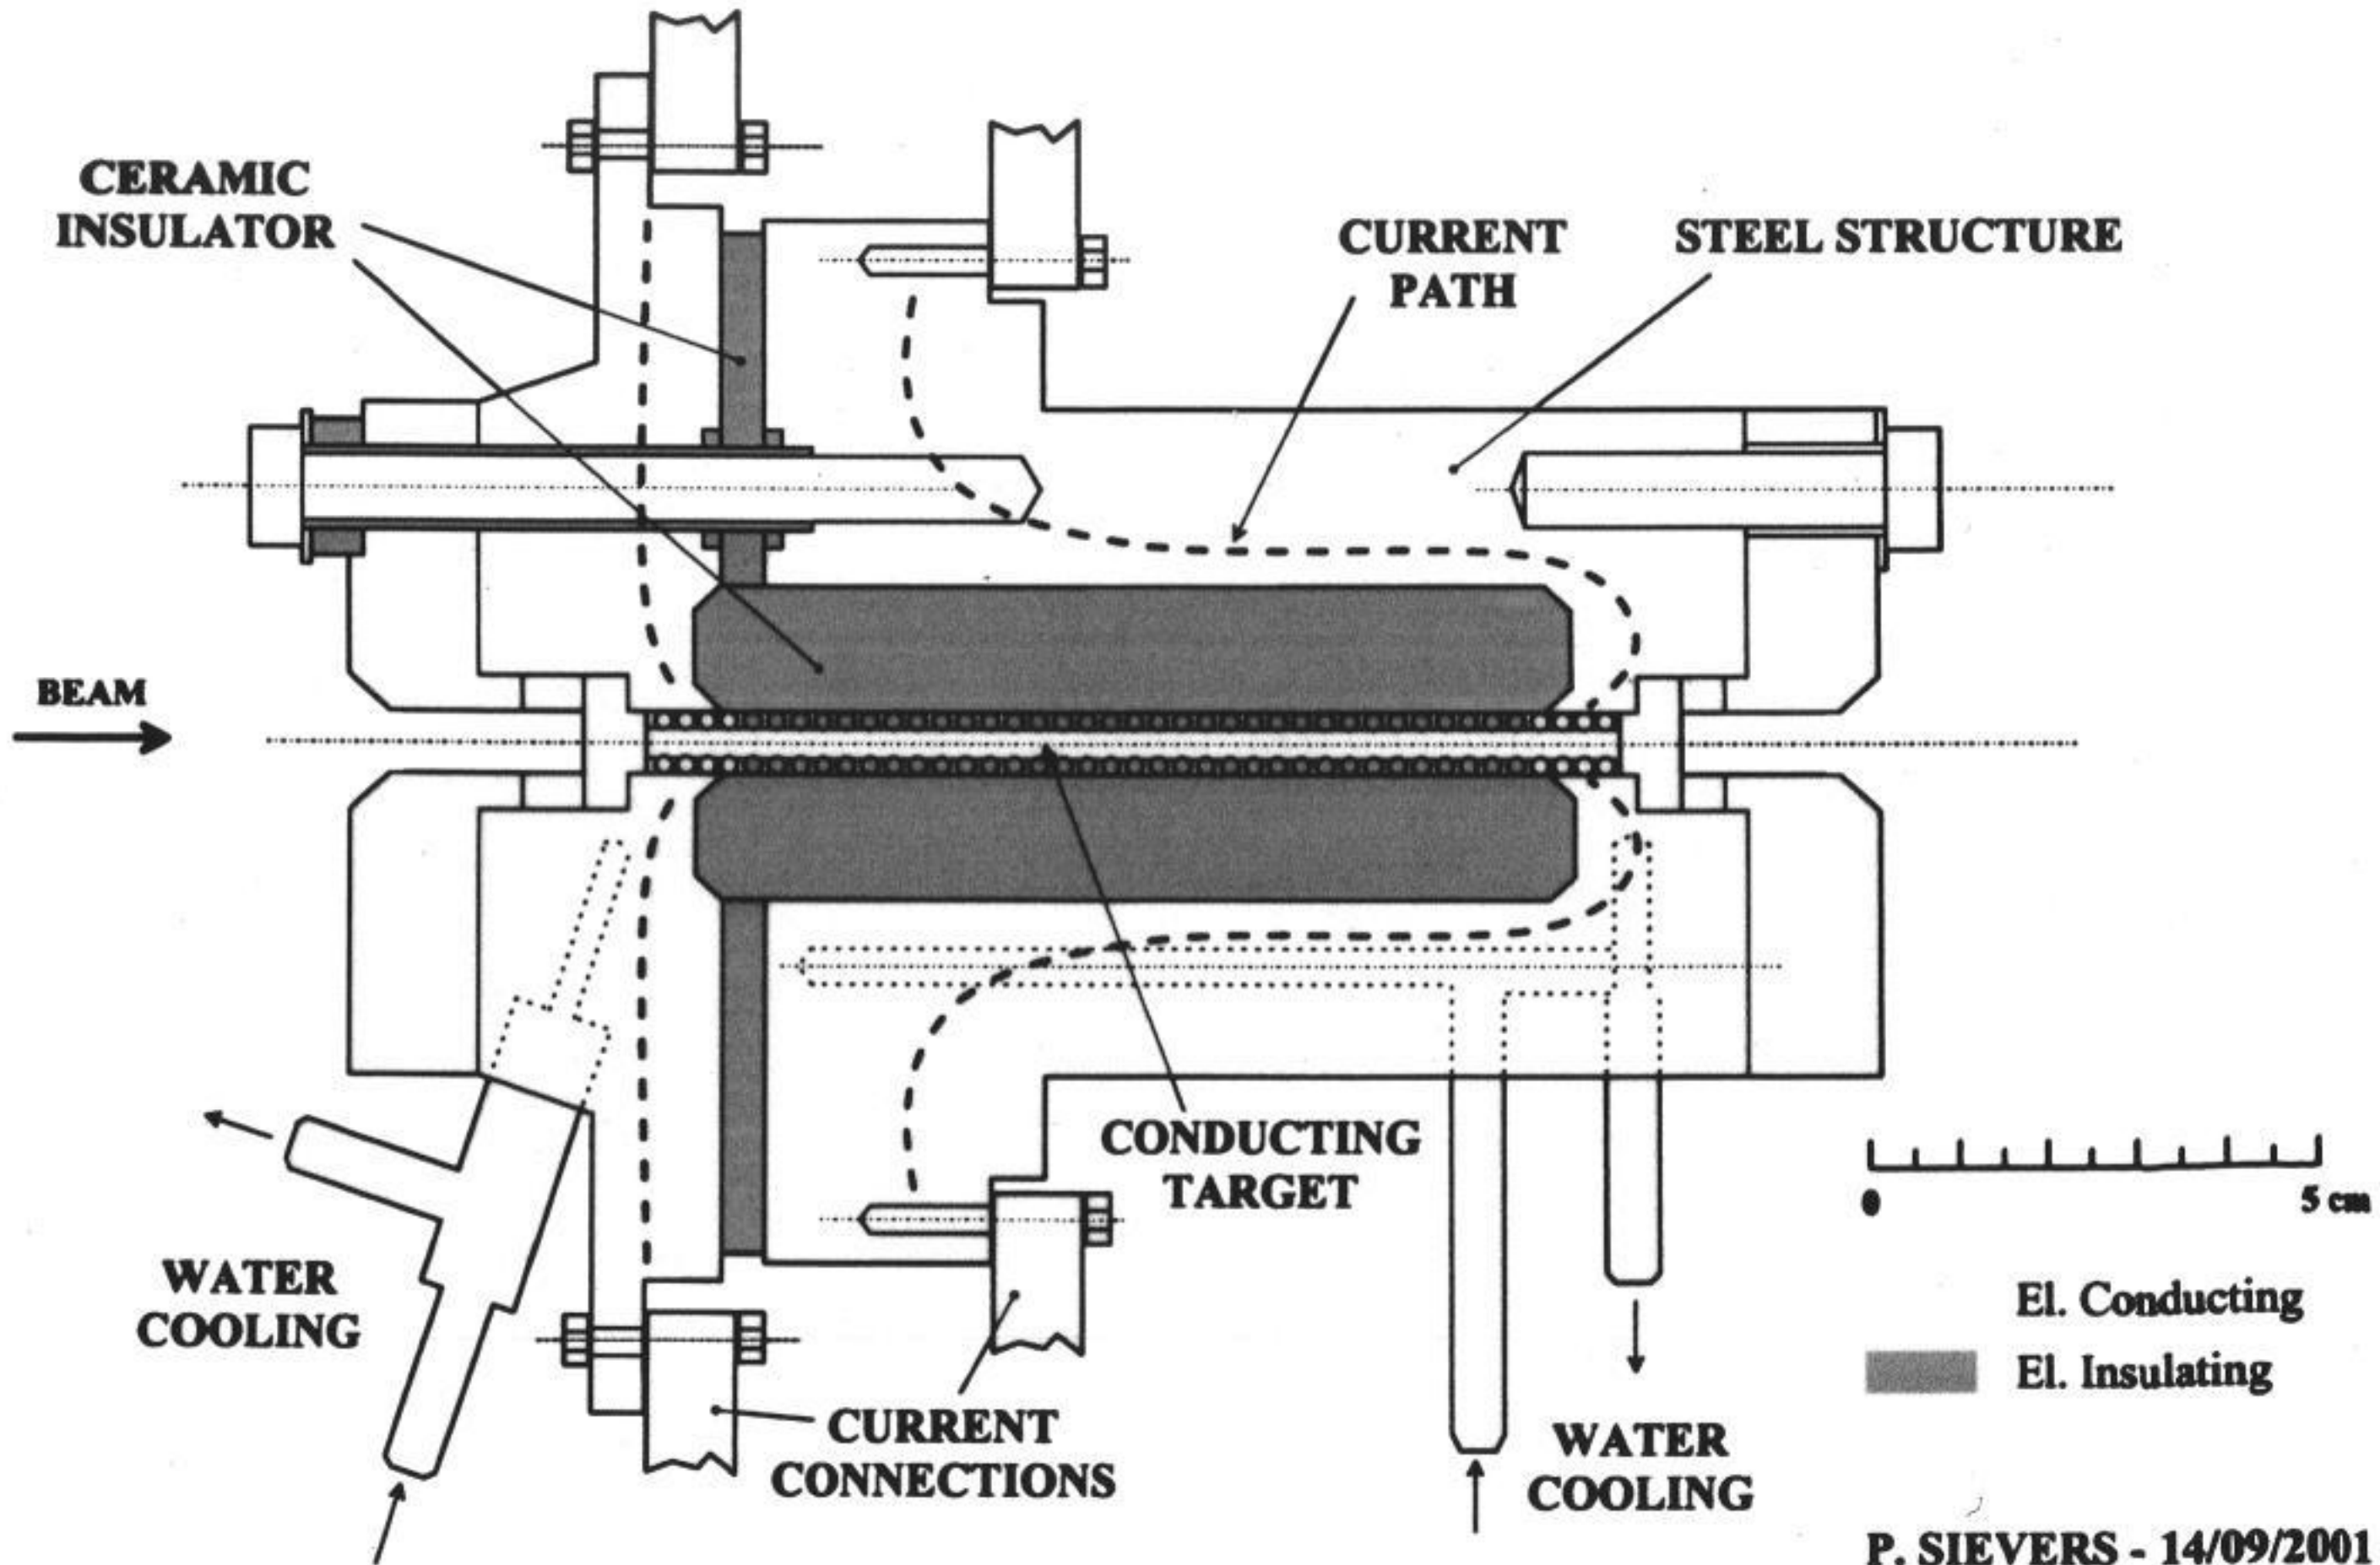

10 CM

